









FR**FR 15****FR 35****FR 50****FR 55**

MALLI	STAATTINEN KUORMA	DYNAAMINEN KUORMA	PAINO	PAINO	PÄÄN	PÄÄN	PÄÄN	PÄÄN	PÄÄN	PÄÄN
	kg	kg	kg	bar	Nm	l/min	D			





				GC	R	GO				
FR 15	1200	600	10	300	250	200	360° cont.	500	10	25
FR 35	3500	1750	17	300	250	200	360° cont.	900	20	25
FR 50	5000	2500	25	300	250	200	360° cont.	1100	20	25
FR 50/30	5000	2500	25	300	250	200	360° cont.	1100	20	30
FR 55	5500	2700	28	300	250	200	360° cont.	1300	20	25
FR 55/30	5500	2700	28	300	250	200	360° cont.	1300	20	30

GC: Koura kiinni

GO: Koura auki

R: Pyörintä

Muutokset teknisiin ominaisuuksiin pidätetään

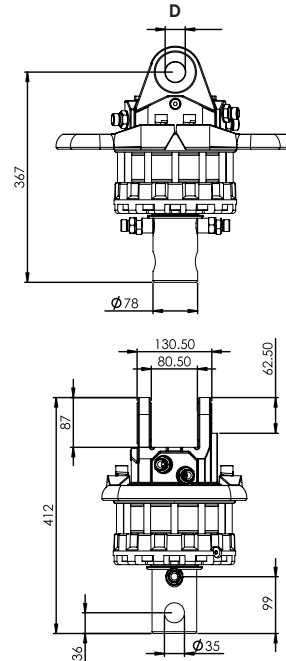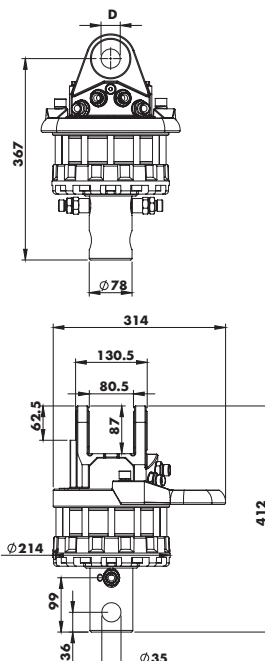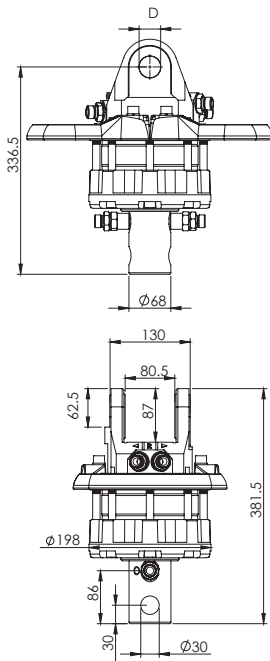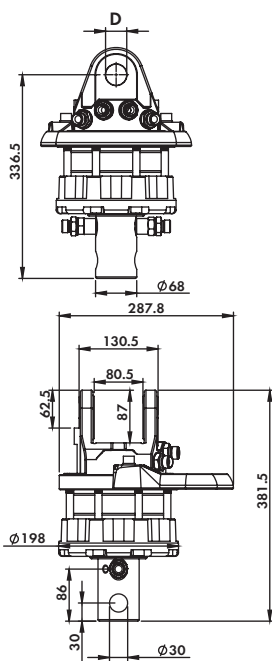FR**FR 85 SX****FR 85 SX/2****FR 128 SX****FR 128 SX/2**

MALLI	STAATTINEN KUORMA	DYNAAMINEN KUORMA	PAINO	PAINO	PAINO	PAINO	PAINO	PAINO	PAINO	PAINO	PAINO
	kg	kg	kg	bar	Nm	l/min	D				

				GC	R	GO				
FR 85 SX	7000	3500	36	300	250	200	360° cont.	1900	25	35
FR 85 SX/2	7000	3500	38	300	250	200	360° cont.	1900	25	35
FR 128 SX	12000	6000	48	300	250	300	360° cont.	2700	30	35
FR 128 SX/2	12000	6000	51	300	250	300	360° cont.	2700	30	35

GC: Koura kiinni

GO: Koura auki

R: Pyörintä

Muutokset teknisiin ominaisuuksiin pidätetään