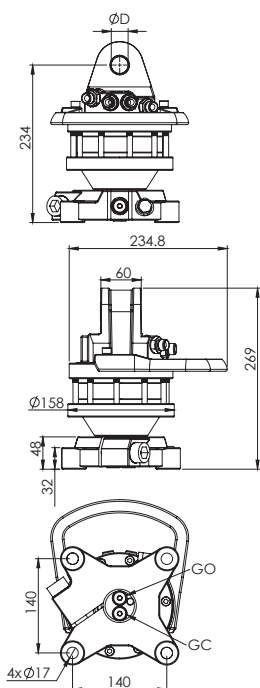
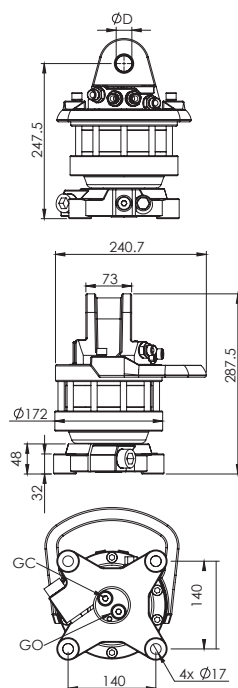
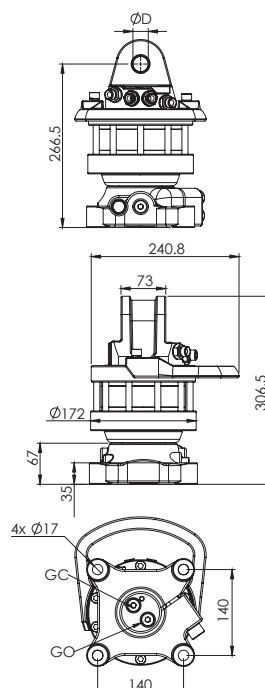
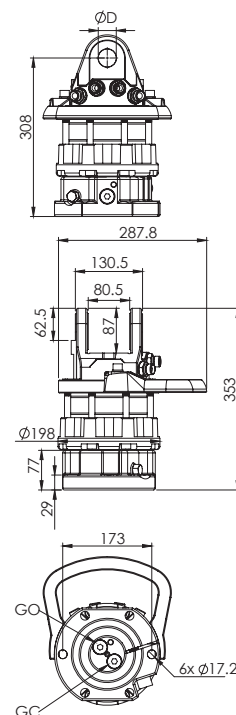


FR F**FR 35 F****FR 50 F****FR 55 F****FR 85 SXF**


MALLI	STAATTINEN KUORMA	DYNAAMINEN KUORMA	PAINO	PAINE			PYÖRINTÄ	VÄÄNTÖ-MOMENTTI	ÖLJYN VIRTAUS	D
	kg	kg	kg	bar				Nm	l/min	mm
				GC	R	GO				
FR 35 F	3500	1750	22	300	250	200	360° cont.	900	20	25
FR 50 F	5000	2500	28	300	250	200	360° cont.	1100	20	25
FR 50 F/30	5000	2500	28	300	250	200	360° cont.	1100	20	30
FR 55 F	5500	2700	33	300	250	200	360° cont.	1300	20	25
FR 55 F/30	5500	2700	33	300	250	200	360° cont.	1300	20	30
FR 85 SXF	7000	3500	41	300	250	200	360° cont.	1900	25	35

GC: Koura kiinni

GO: Koura auki

R: Pyörintä

muutokset teknisiin ominaisuuksiin pidätetään

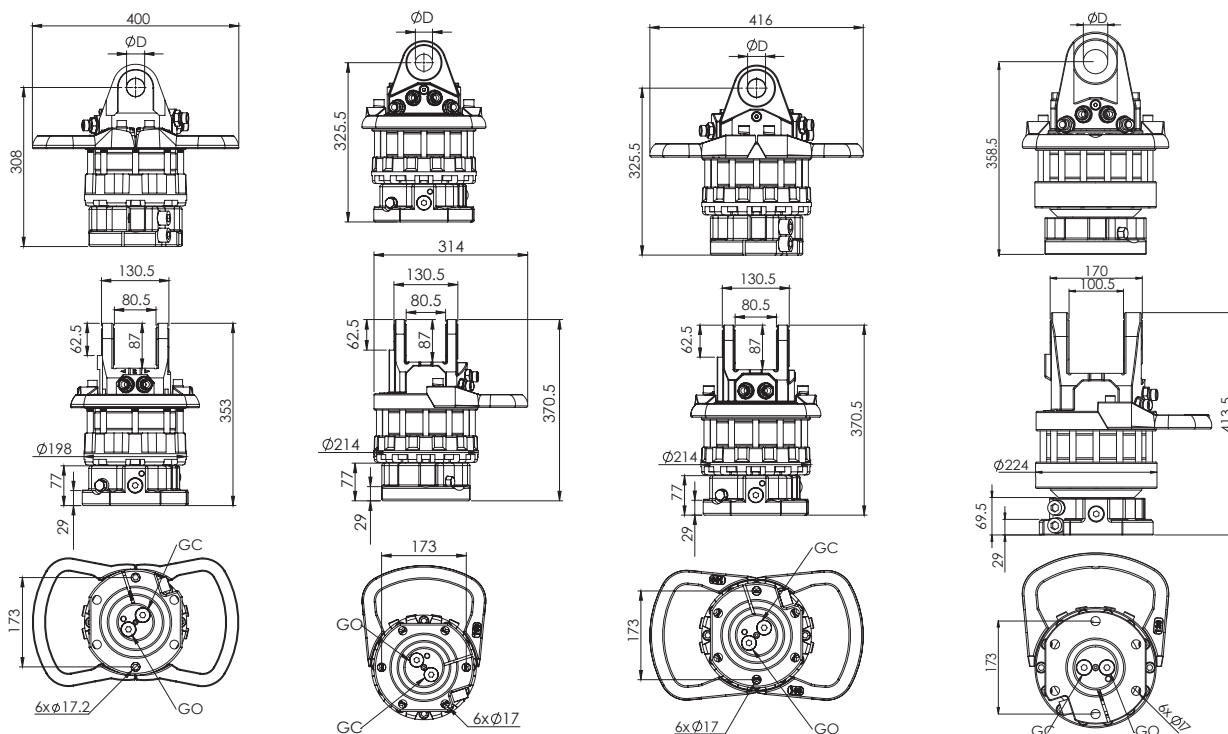FR F
FR 85 SXF/2 FR 128 SXF FR 128 SXF/2 FR 165 SXF


MALLI	STAATTINEN KUORMA	DYNAAMINEN KUORMA	PAINO	PAINE			PYÖRINTÄ	VÄÄNTÖ- MOMENTTI	ÖLJYN VIRTAUS	D
	kg	kg	kg	bar				Nm	l/min	mm
				GC	R	GO				
FR 85 SXF/2	7000	3500	44	300	250	200	360° cont.	1900	25	35
FR 128 SXF	12000	6000	56	300	300	300	360° cont.	2700	30	35
FR 128 SXF/2	12000	6000	59	300	300	300	360° cont.	2700	30	35
FR 165 SXF	16000	6000	67	300	250	300	360° cont.	3300	25	45

GC: Koura kiinni

GO: Koura auki

R: Pyörintä

Muutokset teknisiin ominaisuuksiin pidätetään